

PIT BULL™

DOZER BLADES




FRONT WHEEL ASSIST TRACTOR MODELS



PIT BULL
DOZER BLADES



A FARMER'S BEST FRIEND

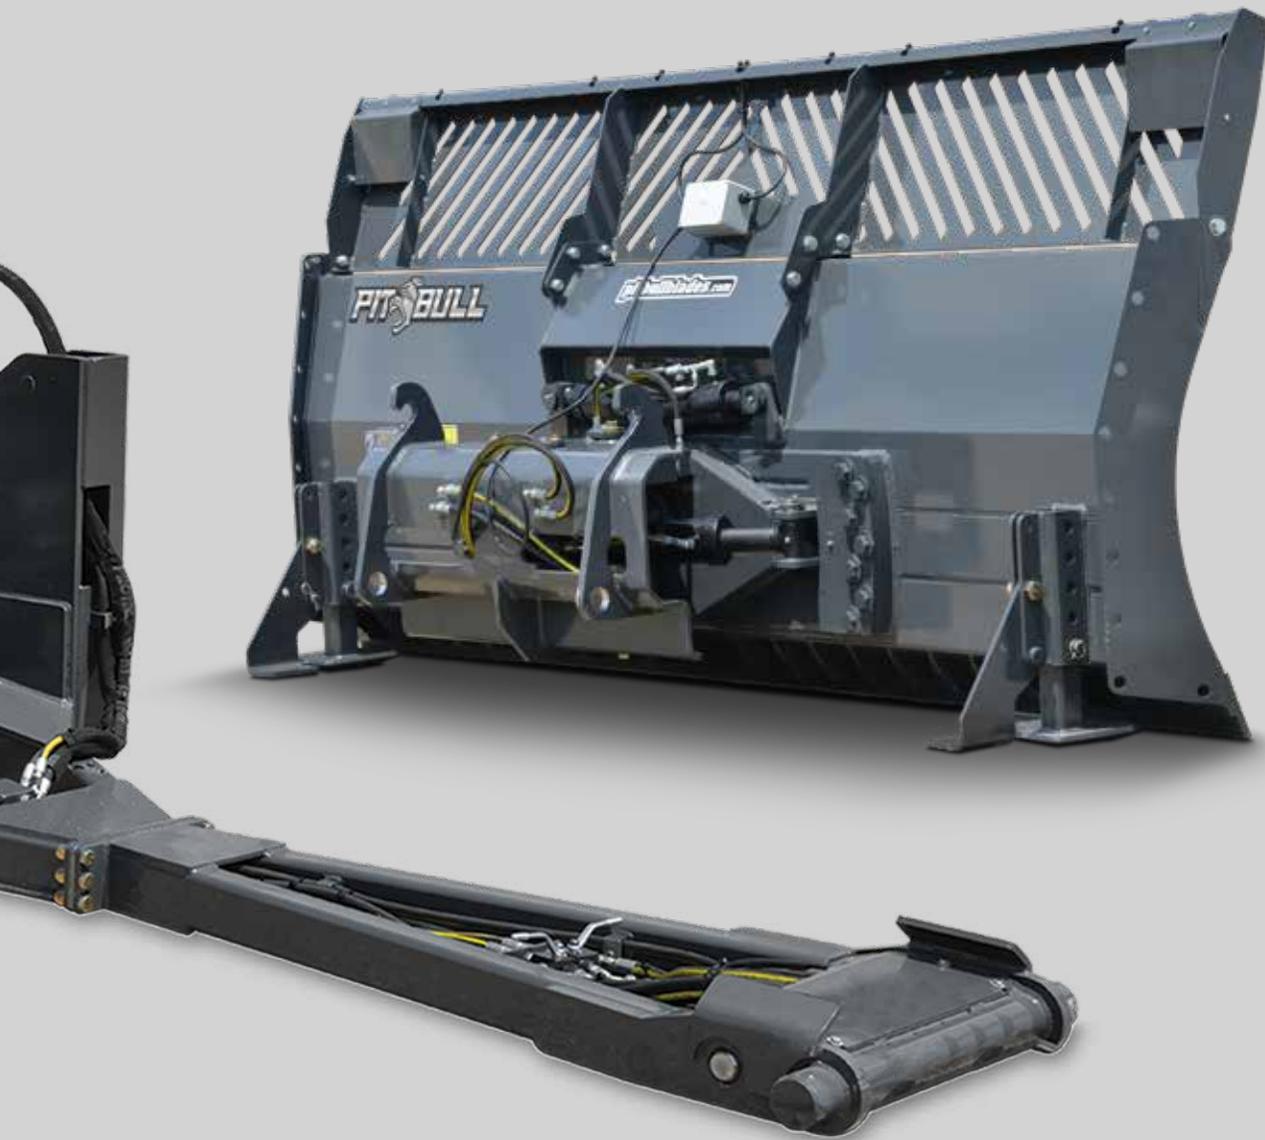

Continuing to provide farmers across North America with the ultimate material handling dozer blade, Pitbull now offers blades designed for front wheel assist tractors. These new models offer class-leading maneuverability with Pitbull's 8-way blade control including forward pitch and parallel lift.

The slim design of Pitbull's hitchless undermount bracket means no bulky lift assembly and provides optimal ground clearance, allowing full use of your tractor when the blade is detached. Pitbull blades for front wheel assist tractors are available in models designed for 100–500HP category tractors.

D2X

DUAL DISCONNECT UNDERMOUNT

With the introduction of the D2X Dual Disconnect Undermount, Pitbull has completely changed the way undermount systems should perform. The D2X features both blade-only coupling as well as full undermount system disconnect.



Undermount appearance may vary depending on tractor model.



BLADE ONLY DISCONNECT

Disconnecting at the blade is quick and easy, leaving the lifting assembly available for other applications and easier road travel. The lifting assembly tucks tightly against the nose of the tractor for unobstructed sightlines.



UNDERMOUNT DISCONNECT

Removing the D2X undermount is a simple process that only takes a few minutes. With the full undermount disconnected, only a few coupling brackets remain, restoring the tractor to near original condition. The front bracket accepts OEM counterweights just as before.

8-WAY BLADE CONTROL

Take command and control on each pass, putting silage, dirt and snow exactly where you want it with Pitbull's available 8-way blade control, including parallel lift and forward pitch.

PARALLEL LIFT

Lift high and straight using Pitbull's parallel lift design. Parallel lift keeps the blade facing the load, maintaining edge control and rolling material forward.



FORWARD PITCH

Gain greater edge precision with forward pitch control, tipping the blade forward for greater edge pressure and improved back dragging.



30° SIDE ANGLE

Move material side-to-side with the pushing strength of Pitbull's heavy-duty hydraulic cylinders for angling.



10° TILT ANGLE

Easily shape the pile or reach low with hydraulic tilting control.



FEATURES



ADJUSTABLE SKID SHOES

Raise and lower the heavy plate skid shoes to the perfect height using the ratchet style adjustment.



GROUND CLEARANCE

Pitbull blades allow for maximum ground clearance. Actual clearance may vary based on tractor models.



EASY HYDRAULICS CONNECTION

Connect all hydraulic hoses at one time with the simple lever that makes hook up hassle-free.



MITERED ENDS

For precision dozing flush against walls when the blade is angled.



FOLDING LEG

Easily fold up the support leg with a single pin while the blade is in use.



MODEL SPECIFICATIONS

FWA 1030 HP Range 100-300

Mould Board Height	40"	58" With Splash Guard
Lift Height*	40" - 45"	

4-Way FWA1030 series

Model	Width	Width - 30° Angle	Weight**
FWA10304W10	10' Blade	107"	4200 lbs
FWA10304W12	12' Blade	124"	4350 lbs
FWA10304W14	14' Blade	150"	4550 lbs

8-Way FWA1030 series

Model	Width	Width - 30° Angle	Weight**
FWA10308W10	10' Blade	107"	4450 lbs
FWA10308W12	12' Blade	124"	4550 lbs
FWA10308W14	14' Blade	150"	4650 lbs

FWA 3050 HP Range 300-600

Mould Board Height	44"	62" With Splash Guard
Lift Height*	40" - 48"	

4-Way FWA3050 series

Model	Width	Width - 30° Angle	Weight**
FWA30504W10	10' Blade	107"	-
FWA30504W12	12' Blade	124"	-
FWA30504W14	14' Blade	150"	-
FWA30504W16	16' Blade	166"	-


8-Way FWA3050 series

Model	Width	Width - 30° Angle	Weight**
FWA30508W10	10' Blade	107"	-
FWA30508W12	12' Blade	124"	-
FWA30508W14	14' Blade	150"	-
FWA30508W16	16' Blade	166"	-

*Lift height may vary depending on tractor model

**Weight includes silage extension and undermount

OPTIONS

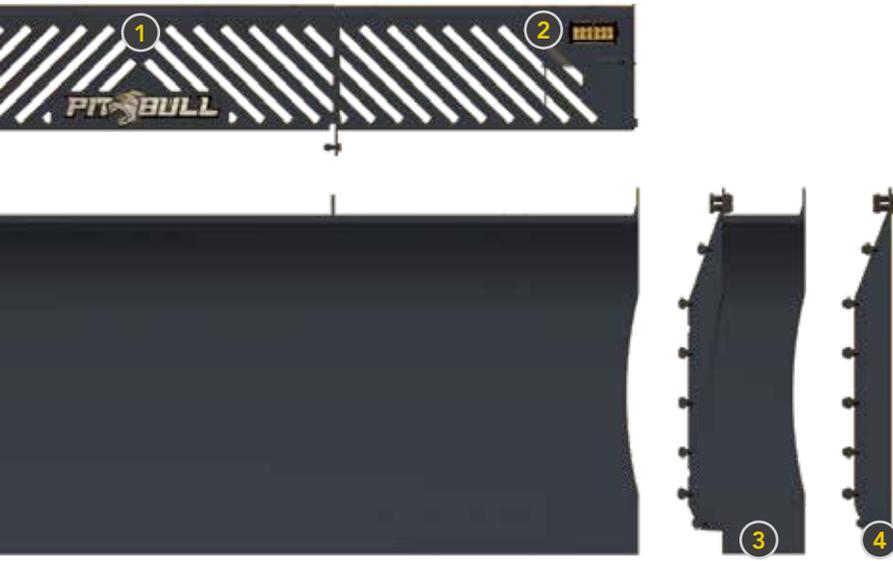

1 Grill Extension (Opt.):
Push more material without sacrificing your visual sight-lines with a bolt-on height extension for the mouldboard.

2 LED Lights (Opt.):
Don't let darkness get in the way with a compatible LED light system for the Grill Extension.

3 Bolt-on Extensions (Opt.):
Maximize each pass with 12 inch bolt-on extensions, extending the blade an extra 24 inches.

4 Bolt-on End Plates (Opt.):
High Volume End Plates improve load control and carrying ability.

5 High Volume Silage End Plates
prevents the plates from bottoming out when piling.



High Volume Silage Endplate



High Volume Endplate



Pitbull warrants to the original purchaser all products to be free from defects in material and workmanship for a period of two (2) years from the date of purchase.

Produced by Tube-Line Manufacturing Ltd.



1.888.856.6613

www.pitbullblades.com

6455 Reid Woods Drive, Elmira
Ontario, Canada, N3B 2Z3

FOUR WHEEL DRIVE TRACTOR
MODELS ALSO AVAILABLE



Authorized Dealer